

### Over 11,000 different shades

Temaspray paints are available from specialist Temaspeed distributors stocking Tikkurila industrial coatings and come in exactly the same shades as all the other paints and coatings you use. The Temaspeed Premium tinting system can quickly provide you with more than 11,000 precise shades, hence ensuring exactly the right colours to match any paint repair or touch up job.

### Temaspray applications

#### For professional use

- For painting and retouching engineering products
- Repairing damage caused during installation and transportation
- Maintenance and repair of paint damage to vehicles, machinery, equipment and furniture
- Markings

#### For home use

- Repairing and touching up damage to metallic surfaces and objects
- Vehicles, cycles, mopeds
- Ladders, railings, fences, gates and other metal structures
- Other minor applications

### Temaspray Primer

A light grey (TVT 4004), one-component alkyd primer with an anti-corrosion pigment for steel, aluminium and zinc surfaces. An ideal primer for all Temaspray paints.

### Temaspray 1C

The following one-component primer and surface paints are suitable for aerosol use:

- Temaprime EUR
- Temaprime EE
- Temaprime GF
- Temaprime ML
- Temalac FD 20, 50, 90
- Temalac ML 90

### Temaspray 2C


Two-component polyurethane paints are available in thousands of shades. The aerosol contains a pre-filled conversion agent that changes the product into a one-component air-drying paint. The properties may differ from the polyurethane paints cured with a hardener. The following polyurethane paints are suitable for aerosol use:

- Temadur 20, 50, 90
- Temathane 50, 90
- Temadur SC 50, SC 80
- Temadur Clear



**Industrial Paint Service**

Ask your Temaspeed distributor for more information about the new, handy Temaspray products and their various applications.

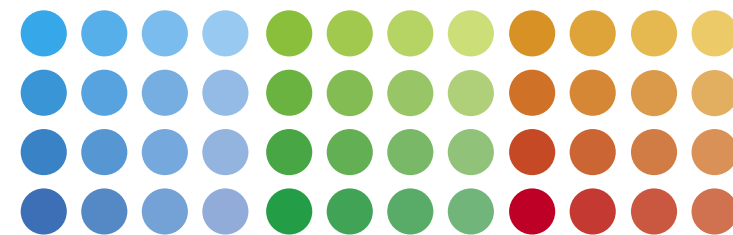

# Temaspray aerosol paints

Professional paints in thousands of shades  
now available in handy aerosol cans



# Paint, repair, and touch up – simply and professionally

**Temaspray paints are for painting small metallic objects and repairing and touching up slightly damaged painted surfaces. Use Temaspray to repair scratches, chips and minor defects. You can also easily give the finishing touch to surfaces damaged in transportation, installation, usage and repair. Cover small painting defects discretely and make old painted surfaces look like new. The professional Temaspray aerosol paints are based on one- and two-component paints and lacquers developed and manufactured by Tikkurila Coatings Oy.**

## **For immediate use**

**Temaspray 1C** and **2C** are ready to use immediately after adding the paint. The aerosol cans contain propellant and solvents. Grey **Temaspray Primer** is immediately ready for use on steel, aluminium and zinc surfaces. The aerosol contains approx. 100 ml of paint, which is enough for painting an area of 1.5 m<sup>2</sup>. Temaspray paints and lacquers are ideal for use with Temaspray Primer to paint a variety of metallic surfaces.



## **Application**

Make sure the surface to be painted is clean, dry and at room temperature. Gently rub the surface with a fine water sanding paper and carefully remove the dust. Use tape, paper or insoluble plastic to protect any areas you do not want to paint. Ensure adequate ventilation and use appropriate personal protective wear.

Shake the aerosol vigorously at room temperature. Paint several thin layers at a distance of 20-30 cm from the surface to be painted. Let each layer dry for 5-10 minutes. Clean the aerosol nozzle after painting by turning the can upside down and pressing the nozzle until only gas comes out. Remove any fresh splashes or defects with an acetone or xylene based solvent.

## **Protect your health, safety and the environment**

Temaspray aerosol paints and lacquers use xylene and acetone as a solvent. They are propelled by propane/butane gas, which does not harm the ozone layer. The paint spray is highly inflammable and should never be used near open flame or glowing objects, or in places where static electricity could cause sparking. Smoking is prohibited where Temaspray aerosol paint or lacquer is being applied.

The paint spray is dangerous if inhaled or in contact with the skin. Use Temaspray products outdoors or only in adequately ventilated spaces. Always wear suitable protective clothing, gloves and eye/face protection. Never store aerosol sprays in direct sunlight or at temperatures above 50°C. Do not puncture pressurised containers or dispose of by burning, even when empty.

### **Handy Soft Button nozzle – for the professional touch**

*Temaspray bottles are equipped with a Soft Button nozzle to emit a fan-shaped paint spray. The nozzle can easily be adjusted for horizontal or vertical painting to give a smoother finish than conventional nozzles. Even inexperienced users can easily achieve a professional looking result.*



Soft Button nozzle



Conventional nozzle

